



## Z62-H370.01 S5W2

### Pneumatic taper change

Item no. **10403014**

HF-Spindle for high-speed milling, -grinding, -drilling, -engraving

### Bearings

Hybrid ball bearing (pcs)	3
Lifetime lubricated	maintenance free

### Motor

Motor technology	3-phase asynchronous drive (no brushes or sensors)
Frequency	1.167 Hz
Motor poles (pairs)	1
Rated rotation speed	70.000 rpm
Acceleration/braking value Per second	10.000 rpm (other values by consultation)


### Power values

Liquid cooled


	Pmax./5s	S6-60%	S1-100%	
Rated power	2,1	1,3	1,2	[kW]
Torque	0,48	0,24	0,22	[Nm]
Voltage	214	206	206	[V]
Current	11	6,5	6,1	[A]

**Z62-H370.01 S5W2**

Pneumatic taper change  
Item no. **10403014**

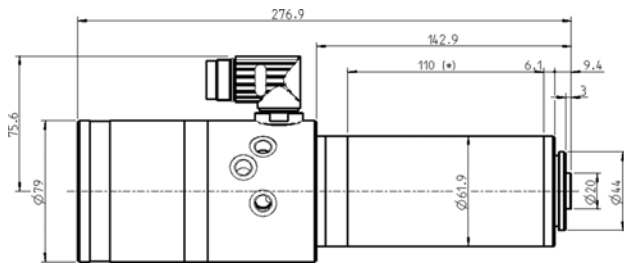

Dimensions

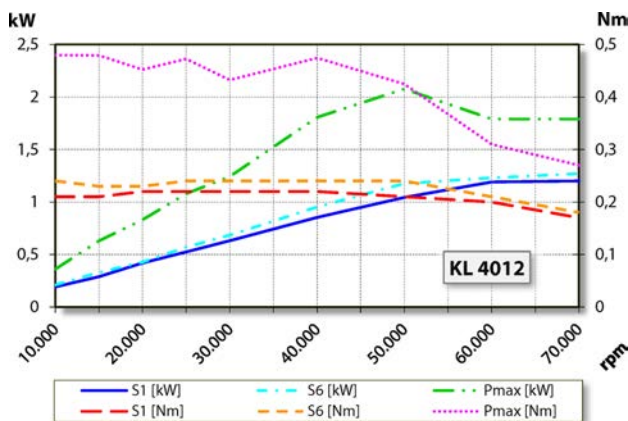

Performance Diagram

Liquid cooled

Measurement of power is funded by in-house testing.

**Characteristics**

Speed sensor	Differential magneto resistor (TTL) Number of signals = 6
Motor protection	PTC 160°C
Housing	Stainless steel
Housing diameter	61,9 mm
Cooling	Liquid cooled
Ambient temperature	+ 10°C ... + 45°C
Sealing air	
Protection category (sealing air turned on)	IP54
Taper cleaning	
Tool change	Pneumatic taper change
Tool Holder	HSK-E 20
Tool change monitoring	inductive
1 position	clamped
Clamping range up to	6 mm
Clockwise and anticlockwise	
Coupler plug	9-pin (SpeedTEC)
Weight	~ 5,6 kg
Inner taper run out	< 1 μ
Axial run-out	< 1 μ